
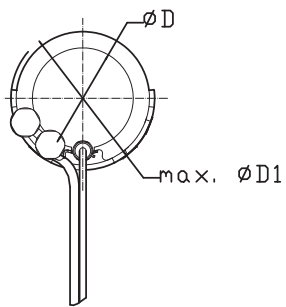


Coilheater

Unevenly wound to give a more even heat supply along the bushings length. Without built-in thermocouple. Voltage 230 V. Each heater is separately tested when produced to ensure high quality. The dimension of the resistanc wire is made so it will not be damaged even if the heater is used with maximum power constantly. The length can be adjusted if needed by pulling the heater.

Part NO	$\Phi D/mm$	$\Phi D1/mm$	L/mm	Wattage/W	H
CS14120330200	12.3	16.7	33	200	70
CS14120430200	12.3	16.7	43	200	
CS14120530225	12.3	16.7	53	225	
CS14120730250	12.3	16.7	73	250	
CS14120930350	12.3	16.7	93	350	
CS14121130350	12.3	16.7	113	350	
CS14150310260	15.3	19.7	31	260	70
CS14150510300	15.3	19.7	51	300	
CS14150710350	15.3	19.7	71	350	
CS14150910450	15.3	19.7	91	450	
CS14151110450	15.3	19.7	111	450	
CS14151310500	15.3	19.7	131	500	
CS14151510550	15.3	19.7	151	550	
CS14210330300	21.3	25.7	33	300	70
CS14210490400	21.3	25.7	49	400	
CS14210690450	21.3	25.7	69	450	
CS14210890500	21.3	25.7	89	500	
CS14211090600	21.3	25.7	109	600	
CS14211290650	21.3	25.7	129	650	
CS14211490700	21.3	25.7	149	700	
CS14211690750	21.3	25.7	169	750	
CS01280520500	28.3	33.7	52	500	70
CS01280680600	28.3	33.7	68	600	
CS01280880700	28.3	33.7	88	700	
CS01281080750	28.3	33.7	108	750	
CS01281280800	28.3	33.7	128	800	
CS01281480850	28.3	33.7	148	850	
CS01281680900	28.3	33.7	168	900	
CS01281880950	28.3	33.7	188	950	

HPO Heater

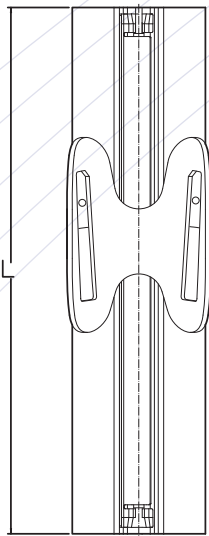

HPO heater which is we together with our heater supplier developed the heater to suit the design and application. Regardless of melt temperature of mould temperature do we have an excellent temperature profile, so good we simply call the heater series THE STRAIGHT!

Of course with our signum, easy to service and maintain.

Part NO.	$\varnothing D/\text{mm}$	$\varnothing D1/\text{mm}$	L/mm	Wattage/W	Buckle	Spare Thermocouple
HS15150310160	15.5	23	31	160	1	TC00160160
HS15150430229			43	229	1	
HS15150560239			56	239	1	
HS15150690248			69	248	1	
HS15150810258			81	258	1	TC00160210
HS15150940267			94	267	2	
HS15151070277			107	277	2	
HS15151320295			132	295	2	TC00160260
HS15151580314			158	314	2	